



VERSION

Quarry version

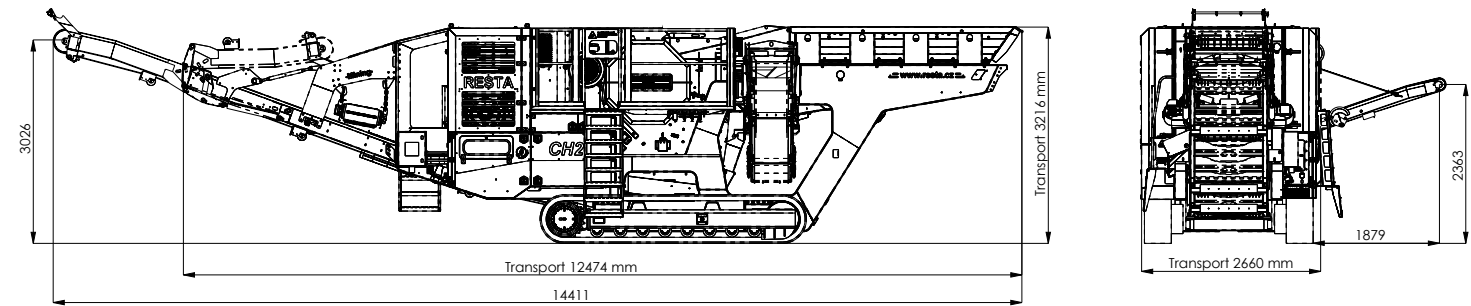

Recycling version

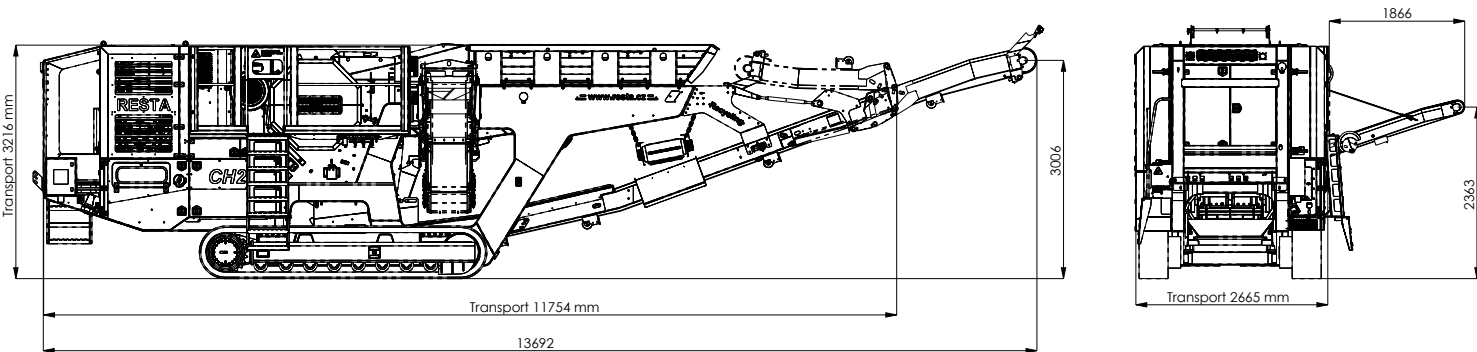

RESTA s.r.o

Contact:

Kojetínská 3120/75  
750 02 Přerov  
Czech Republic


+420 581 741 811  
Fax +420 581 299 958  
✉ resta@resta.cz

Company identification:

CRN: 14616807  
TIN: CZ14616807

GPS: 49.4435458 N, 17.4361281 E

www.resta.cz

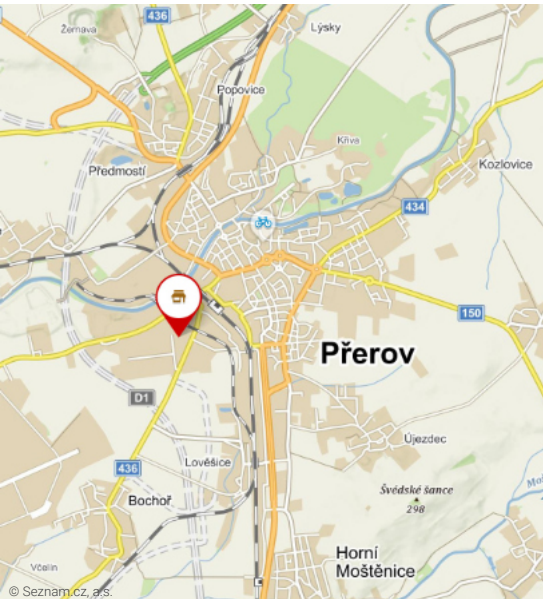

RESTA CH2 900x600  
Mobile jaw crusher

- Jaw crusher

Remote control

Remote data

Plug in

Scale

Eco-friendly

Automatic feeding

Close side setting
- Lighting

Scalping belt

Hyd. crusher setting

Scalping

Diesel electric


Dust supression

Operator shelter

Magnetic separator

Max. feed size	800x600x500 mm
Final product	0-70 mm, 0-250 mm (according to crusher setting)
Troughtput	70-170 t/h
Hopper	6 m³
Weight	29.3 t

DESIGNED FOR:

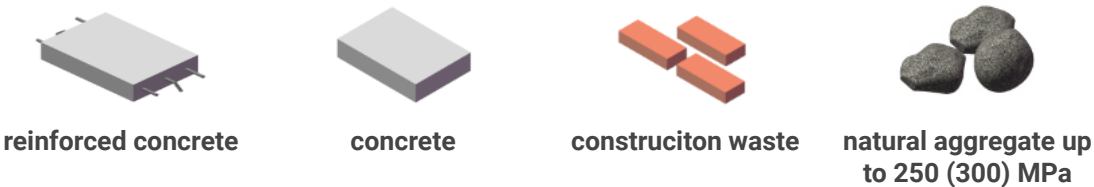

RESTA s.r.o.  
CRN: 14616807  
TIN: CZ 14616807

Kojetínská 3120/75  
750 02 Přerov  
Czech Republic

✉ resta@resta.cz  
☎ +420 581 741 811

www.resta.cz





RESTA s.r.o.  
CRN: 14616807  
TIN: CZ 14616807

Kojetínská 3120/75  
750 02 Přerov  
Czech Republic

✉ resta@resta.cz  
☎ +420 581 741 811

www.resta.cz



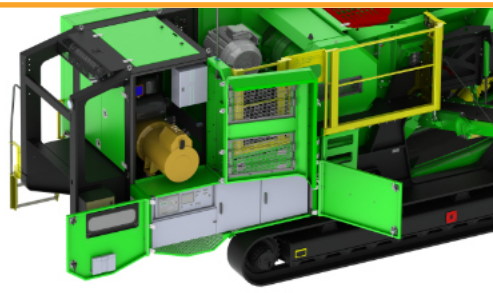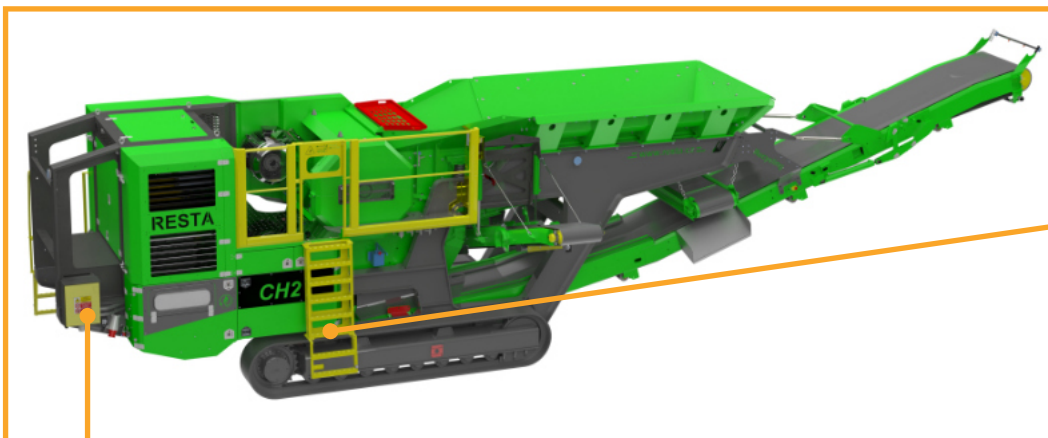

### Operation

- ✓ semi-automatic control
- ✓ easy and safe access to all operation and service points
- ✓ operator shelter option
- ✓ fine proportional control of tracked undercarriage
- ✓ double-gear undercarriage

### Maintenance and service

- ✓ clean compact design
- ✓ easy access
- ✓ simplicity

### Quarry and recycling version



- ✓ optimal efficiency
- ✓ efficient and easy crushing of reinforced concrete – recycling version
- ✓ feeding by an excavator – quarry version
- ✓ easy and rapid setup from transport to working position
- ✓ dust suppression for dust reduction

### Diesel genset

- ✓ low fuel consumption
- ✓ option to use external power supply
- ✓ double sealing of switchboard
- ✓ easy maintenance

### Magnetic separator

- ✓ separation of magnetic pieces from the material
- ✓ reversible direction of rotation (discharge to left or right)
- ✓ adjustable overbelt height

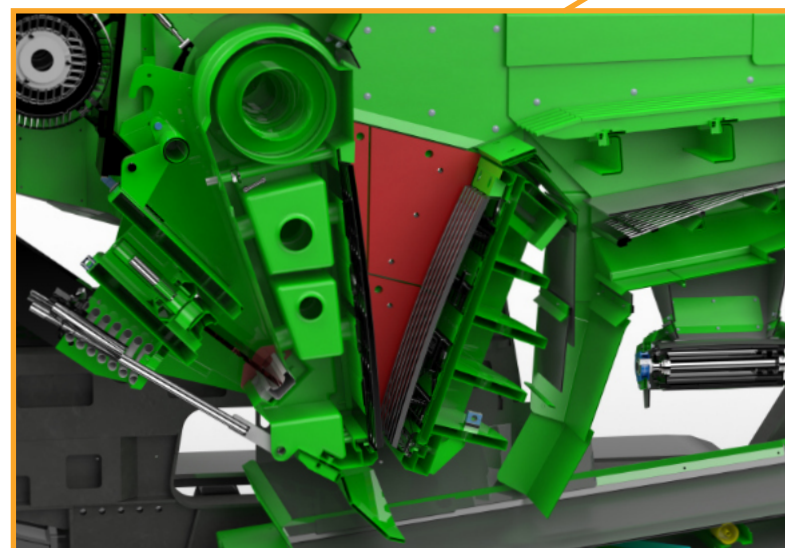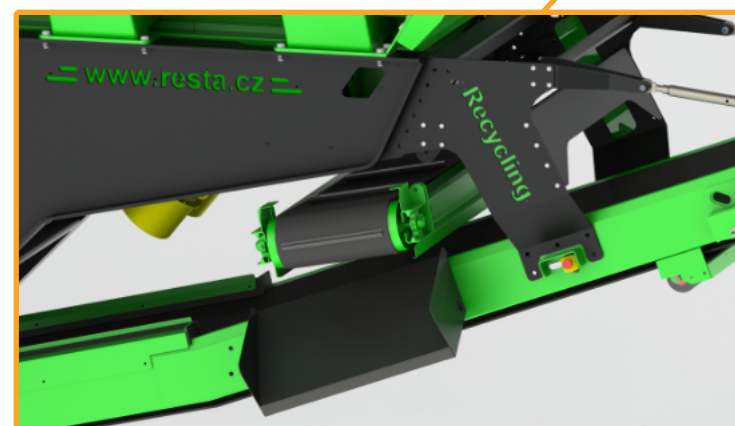


### Crusher

- ✓ low operation costs
- ✓ high operation reliability
- ✓ automatic monitoring of the crusher filling
- ✓ automatic material feeding into the crusher
- ✓ high performance and robust structure
- ✓ integrated drive
- ✓ easy replacement of spare parts
- ✓ option to hydraulically set close side
- ✓ hydraulic version – automatic crusher protection when an uncrushable object gets into the crusher
- ✓ recycling version – option to mount an active iron bender for safe and efficient reinforced concrete crushing

### Side belt for scalped product

- ✓ side belt can be swapped from side to side
- ✓ user-friendly
- ✓ in transport position, it does not restrict access to the crusher

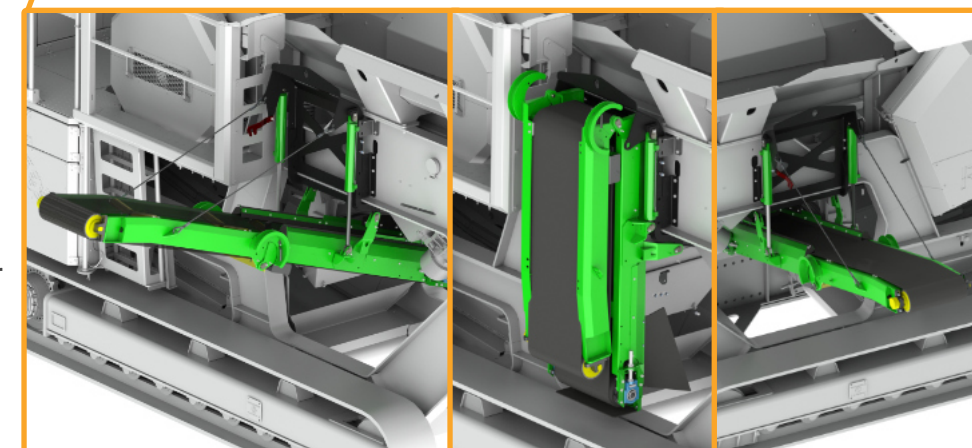

### Hopper and feeder

- ✓ large feeding hopper with low tipping height
- ✓ feeder with fluent feeding regulation

