



VERSION

Working position

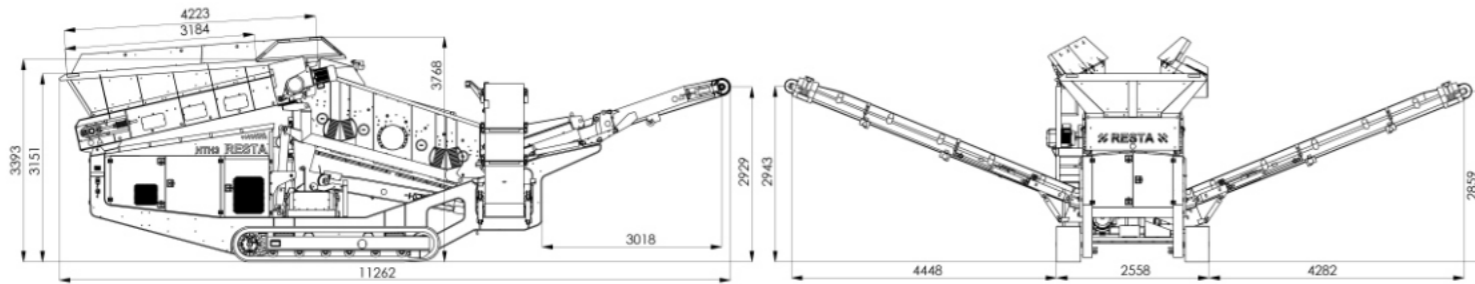

Transport position

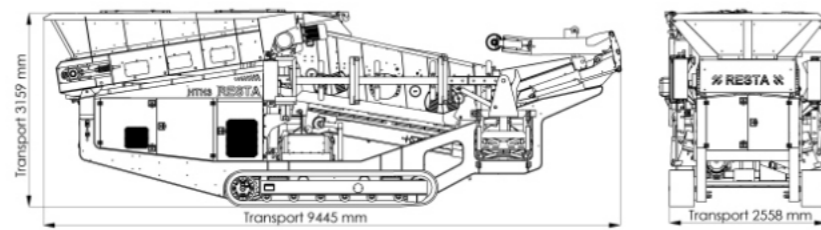

RESTA HTH3 1200x3000 Mobile scalper



Screener



Remote control



Plug in



Eco-friendly



Diesel electric



Apron feeder



Lighting



Horn



Dust suppression

Max. feed size

max. 600 mm

Final product

3 final products (according to used screen mesh)

Throughput

60 - 200 t/h

Hopper

3 m³

Weight

17 t

DESIGNED FOR:



bituminous blocks



concrete



construction waste



natural aggregate

RESTA s.r.o

Contact:

Kojetínská 3120/75
750 02 Přerov
Czech Republic


+420 581 741 811
Fax +420 581 299 958
resta@resta.cz

www.resta.cz

Company identification:

CRN: 14616807
TIN: CZ14616807

GPS: 49.4435458 N, 17.4361281 E

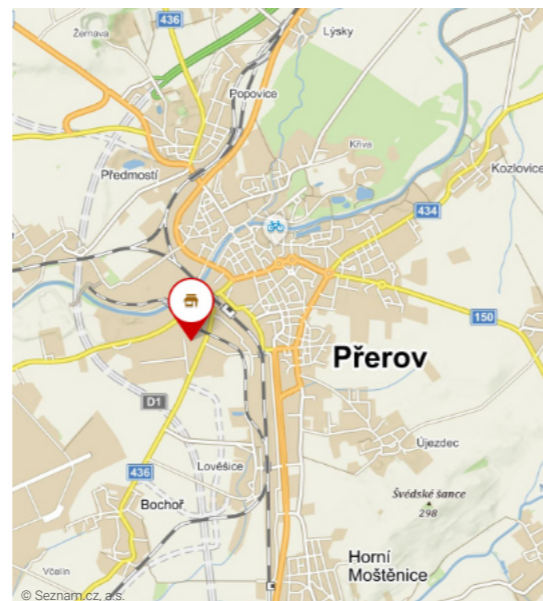

RESTA s.r.o.
CRN: 14616807
TIN: CZ 14616807

Kojetínská 3120/75
750 02 Přerov
Czech Republic

resta@resta.cz
+420 581 741 811

www.resta.cz





RESTA s.r.o.
CRN: 14616807
TIN: CZ 14616807

Kojetínská 3120/75
750 02 Přerov
Czech Republic

resta@resta.cz
+420 581 741 811

www.resta.cz

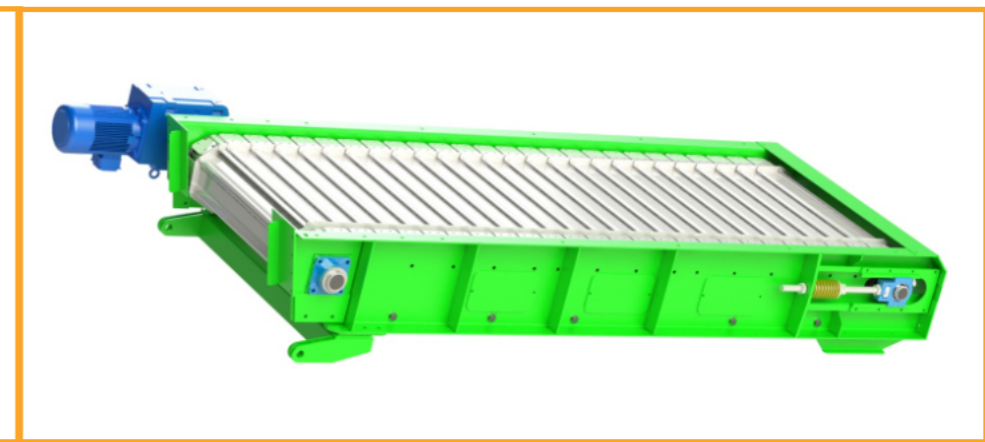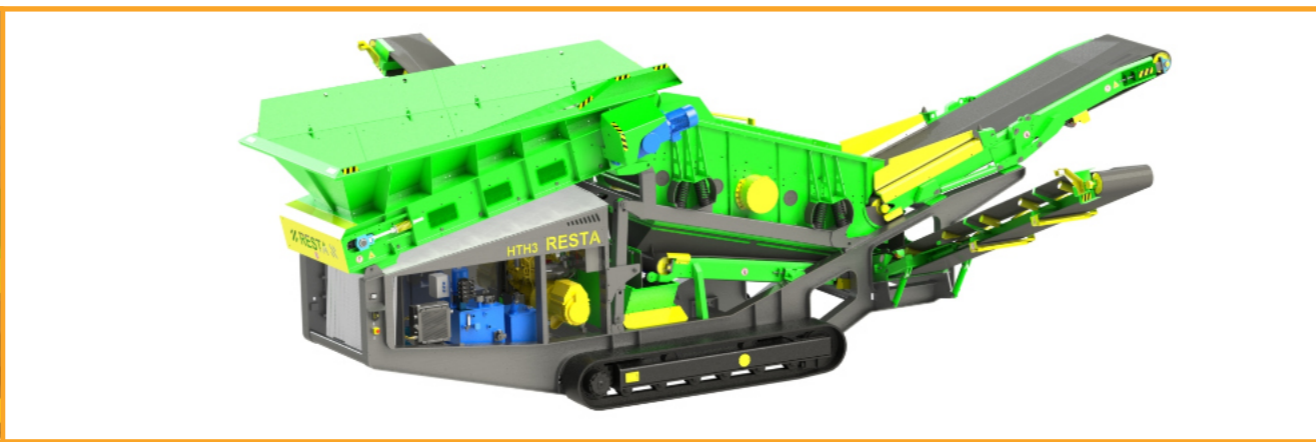

Control panel

- ✓ user friendly
- ✓ double sealing of the control panel
- ✓ mains supply of from generator set
- ✓ lighting

Transport

- ✓ rapid setup into operation from transport position
- ✓ compact dimensions for easy transport
- ✓ low transport weight
- ✓ easy handling
- ✓ remote control

Maintenance and service

- ✓ easy maintenance thanks to electrical drives
- ✓ bearings with lifelong grease
- ✓ easy and safe access to all operation and service points
- ✓ small amount of operation liquids

Screener

- ✓ high variability – 4 types of screening decks (grids, fingers, Hardox, meshes)
- ✓ fluent regulation of the vibrator speed
- ✓ high operation liability
- ✓ high performance and rugged structure
- ✓ easy replacement of spare parts

Feeder

- ✓ rugged feeder aprons
- ✓ tightly mounted aprons with low spillage
- ✓ fluent regulation
- ✓ Nord gearbox

Operation

- ✓ rapid setup into operation from transport position
- ✓ 3 final products
- ✓ high lifetime thanks to minimization of hydraulic system
- ✓ low operating costs due to electrical drives
- ✓ fluent feeding regulation into the screen
- ✓ integrated holder of spare meshes
- ✓ dust suppression

